

PROFILLIO L3


Diffused Aluminium Profile

The Profillio L3 Aluminium Profile is made to suit the Lampada strip light range, providing a linear output and a clean surface mounted or suspended Finish.


Specifications

Input Voltage	220-24VAC @ 50/60Hz
Driver	External
Efficacy	100 lm/W
SMD Brand	EPISTAR
System Power	Surface Mount / Suspended
Material	6063 Extruded Aluminium
Diffuser	Opal/Frost PMMA
Inclusions	End Caps
CRI	> 80
Lifetime	> 50,000 hours
Dimmable	Optional
Cut Length	25mm
Warranty	3 Years**

**Profile not to be used in outdoor applications
Custom cuts up to 3 metres but sold per metre

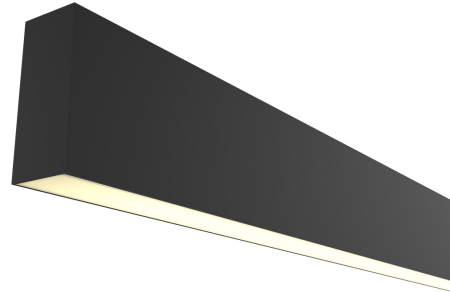

Dimensions

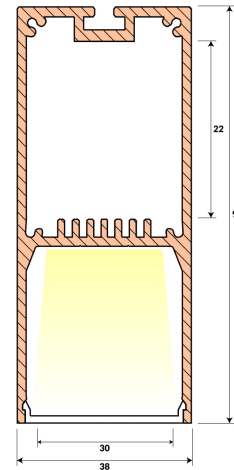

Options & Accessories



White Variant



Silver Variant



Suspension Kit

Order Code	Finish	Wattage	Colour Temperature	Driver Type
PROFILLIOL3				
	AL Aluminium	192 19.2W (RGBW)	WW 3000K Warm White	N NON Dimmable
	BK Black	288 28.8W (White)	CW 4000K Cool White	T TRIAC Dimmable
	WH White	384 38.4W (RGBW)	RGBWW RGB + 3000K Warm White	D DALI Dimmable
		480 48.0W (White)	RGBCW RGB + 4000K Cool White	
			RGBDL RGB + 5000K Daylight	



Read more