

## PROFILLIO R2


Recessed Diffused Aluminium Profile

The Profillio R2 Aluminium Profile is made to suit the Lampada strip light range, providing a linear output and the ability to recess in almost any wall or ceiling applications.


### Specifications

Input Voltage	220-24VAC @ 50/60Hz
Driver	External
Efficacy	100 lm/W
SMD Brand	EPISTAR
Installation	Recessed
Material	6063 Extruded Aluminium
Diffuser	Opal/Frost PMMA
Inclusions	End Caps
CRI	> 80
Lifetime	> 50,000 hours
Dimmable	Optional
Cut Length	25mm
Warranty	3 Years**

\*\*Profile not to be used in outdoor applications  
Custom cuts up to 3 metres but sold per metre

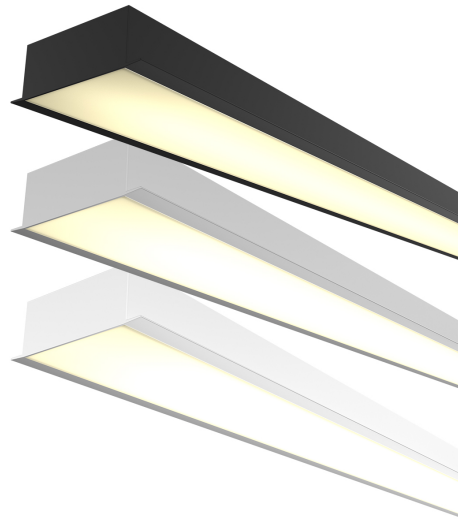

### Dimensions

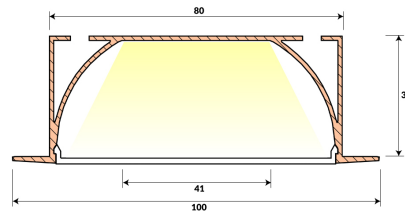

Order Code	Finish	Wattage	Colour Temperature	Driver Type
PROFILLIOR2				
	<b>AL</b> Aluminium	<b>192</b> 19.2W	<b>WW</b> 3000K Warm White	<b>N</b> NON Dimmable
	<b>BK</b> Black	<b>288</b> 28.8W	<b>CW</b> 4000K Cool White	<b>T</b> TRIAC Dimmable
	<b>WH</b> White	<b>480</b> 48.0W	<b>RGBWW</b> RGB + 3000K Warm White	<b>D</b> DALI Dimmable
		<b>768</b> 76.8W	<b>RGBCW</b> RGB + 4000K Cool White	
			<b>RGBDL</b> RGB + 5000K Daylight	

